





Installation Manual

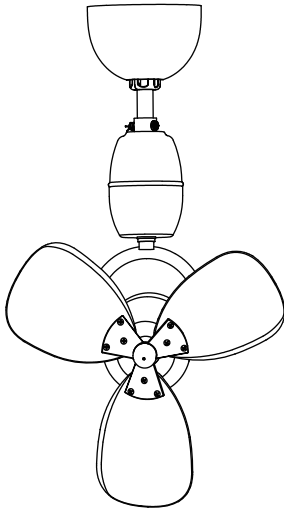

Ceiling fan

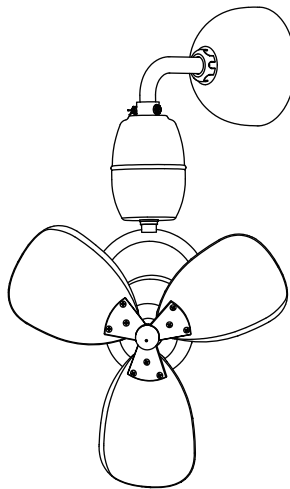

Wall fan

THANK YOU

We appreciate the trust and confidence you have placed in us through the purchase of this ceiling fan. We strive to continually create quality products designed to enhance your home. Thank you for choosing us!

Table Of Contents


Item	Page No.
Table Of Contents	1
Safety Precautions	1
Package Contents	2
Assembly Instructions	3-5
Remote Control Operation	6
Troubleshooting	6

Safety Precautions

IMPORTANT: PLEASE READ BEFORE INSTALLATION


1. Installation must be carried out by a qualified wiring installer.
2. Turn off the electrical mains at the circuit breaker fuse box.
3. Do not use power supply other than 240V / 50Hz.
4. The appliance must be permanently connected to the electricity supply through a double pole switch having contact separation of at least 3mm in all poles.
5. Do not connect ceiling fan to any dimmer switch or regulator.
6. When mounting the fan, ensure that the safety wire is loop across the ceiling mounting hook.
7. The ceiling fan mounting hook must be able to withhold a min. of 35 pounds.
8. The ceiling fan must be mounted at a min. height of 8.2 feet / 2.5m of clearance from the floor and 3 feet / 1m from the wall to the blade.
9. Don't install at areas / Place nearby chemicals and alkaline, flammable areas such as gas cooker, oily places, wet and high humidity area such as a shower foame, high vibration impact and continuesly expose to direct wind.
10. Do not place any objects in the path of the blades.
11. When all electrical connections are done, store all wires neatly.
12. Make sure that screws and connection are tighten till snug.
13. This appliance is not intended for use by persons (including children)with reduced physical,sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
14. Children should be supervised not to play with the appliance.

WarningThis product is designed to use only those parts supplied with this product and / or accessories designated specifically for use with this product. Using parts and / or accessories not designated for use with this product could result in personal injury or property damage.



Package Contents


Tools Needed




1. Pulley component




2. Down rod




3. L Down rod




4. Hanger



5. Body



6. Canopy




7. Blades




8. Leaf frame


Remote control unit

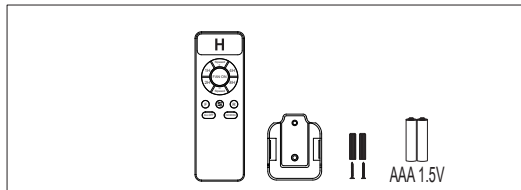


Installation kit

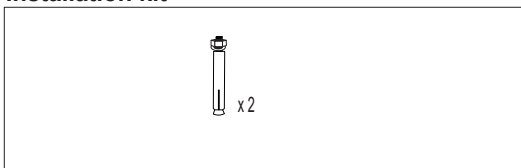

Blade balancing kit



Instructions manual



Note: The illustrations in this manual are for explanation purposes only and may differ from the actual unit. It is subjected to change without prior notice for further improvements.



Assembly Instructions

Step 1(Wall mounted of the fan)


- ① Turn off the fan power at the circuit breaker box and wall switch. Please drill mounting holes at the installation location.




Failure to disconnect the power supply prior to installation may result in serious injury or death.




- ① Screw the blade holder onto the shaft, then attach the fan blade and tighten the nut.




- ② Insert the fan blade component into the motor shaft, then attach the decorative cover, and tighten the screws.

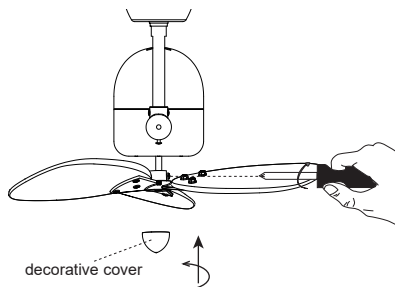

- ③ Insert the hanger onto the bolt, and then sequentially insert the washer and spring.




- ④ Install the fan body onto the hanger.




Assembly Instructions

- ⑤ Follow the wiring diagram for wiring.



- ⑥ Close the canopy, then tighten it with screws and secure it. Adjust the blowing angle.




Step 2 (Ceiling bracket installation and fan into the installed bracket.)


- ① Turn off the fan power supply at the circuit breaker box and the wall switch. If it is a concrete ceiling, please drill the installation hole at the installation location.




Failure to disconnect the power supply prior to installation may result in serious injury or death.




- ② Choose the following installation methods according to the actual situation of the ceiling.

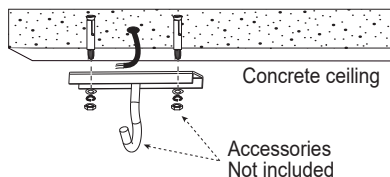

or

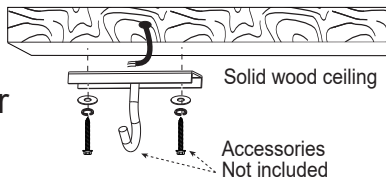


- ③ Select the installation method shown in the figure according to the actual hanging hook. Hang the basically installed fan on the hanging hook, Fix the rubber pulley assembly to the downrod, washer, nut and tighten them firmly.



"U" Hook is being used.


or



"J" Hook is being used.


Assembly Instructions

- ④ Remove the safety wire screw from the pulley component. Then tie the safety wire across the hook as shown.

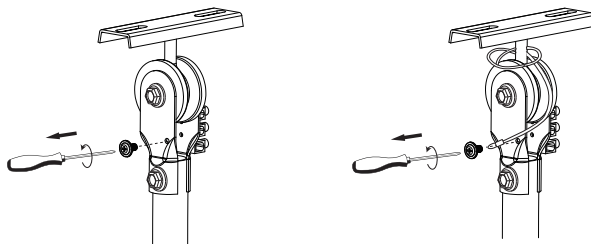


Step 3 (Wiring)


- ① Insert the fan blade component into the motor shaft, then attach the decorative cover, and tighten the screws.

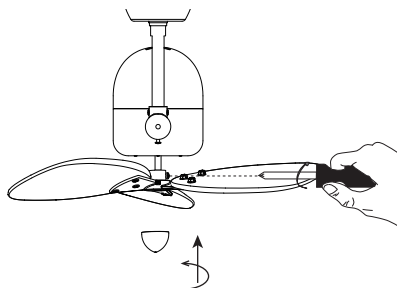


- ② Follow the wiring diagram for wiring.



- ③ Close the canopy, then tighten it with screws, and secure it. Adjust the blowing angle.




- ④ Follow the wiring diagram for wiring.

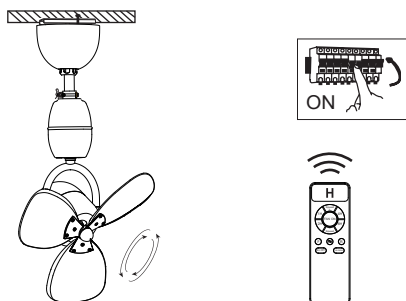


Remote Control Operation

Transmitter learning process

1. Insert the 2 pcs of batteries into transmitter.
2. Turn on the power to the fan. Within 5 sec, press and hold the "8H" button for 3 second. Once the receiver has detected the frequency, receiver will "Beep". Programming process is completed and fan is ready to use.

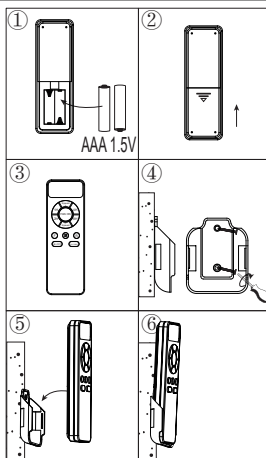

Function of the button



TroubleShooting

Fan does not work

1. Check all fuses or circuit breakers if disconnecting the power supply to the fan.
2. Turn off electrical power and check all wire connections to fan and in switch housing. It must be carried out by a electrician

Fan turns but airflow is inadequate

1. The fan may be running in reverse, so air is going upward.
2. The room may contain items that obstruct the air flow.
3. The fan may be too small for size of the room.

Fan is noisy

1. Assure that the screws fastening blade arm to motor are tight and the lock washers provided for that purpose have been used
2. Lower the upper canopy to ensure a separation from the ceiling of no less than 3mm to reduce noisy
3. Check to see if any of the blades are cracked .If so,replace all of the blades
4. If this is the first use ,leave the fan on for at least 8 hours. In the event that mechanical noise continues after this period,contact certified electrician



TM

QI SEVEN SDN BHD (1620251-W)

 2702F, Jalan Industri 7, Kampung Baru Sungai Buloh, 47000 Sungai Buloh, Selangor Malaysia.

 Tel: +6011 1625 6577

 Email : CS777816@yahoo.com
